
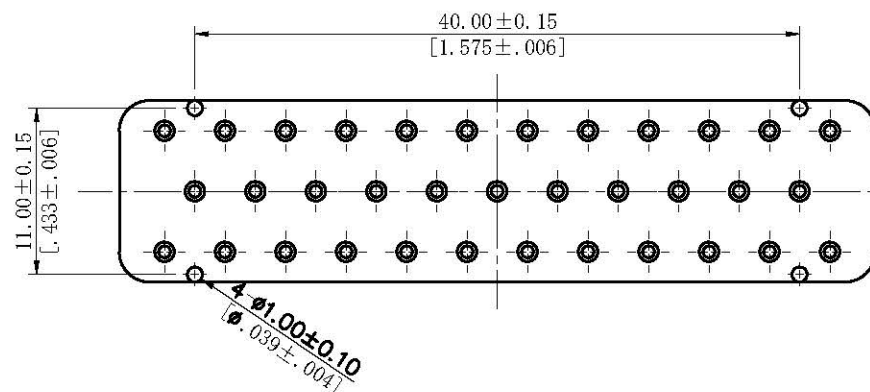
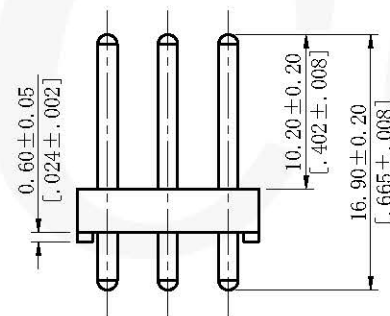
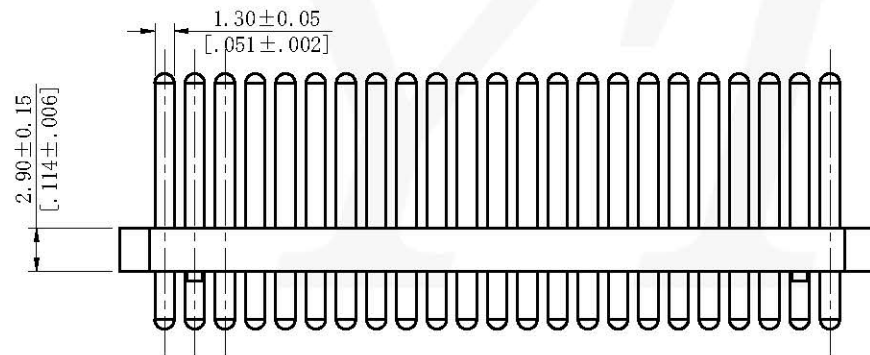


RoHS COMPLIANT

* DUE TO TECHNICAL PROGRESS, ALL THE INFORMATION PROVIDED IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV	REVISION	NAME	DATE

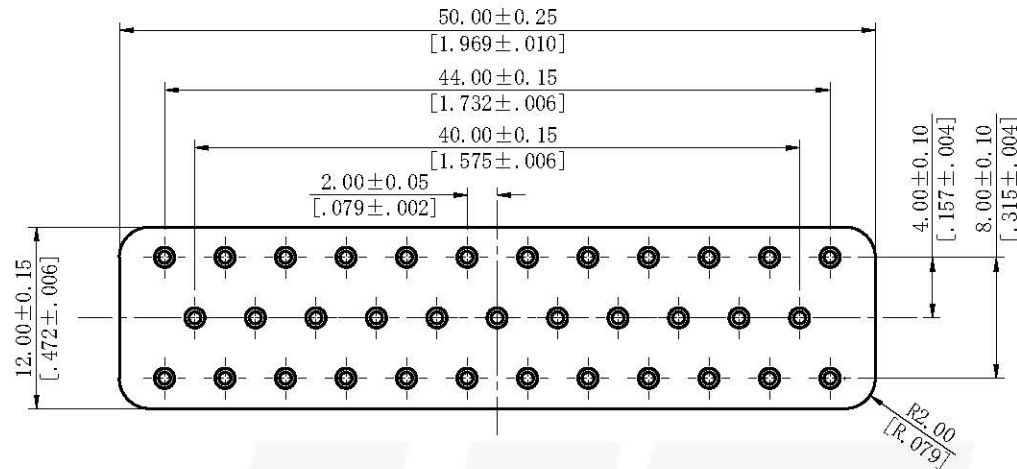

Electrical:
 Current Rating:8.0AMP.
 Contact Resistance:20mΩ Max.
 Insulation Resistance:1000MΩ Min.
 Withstanding Voltage:1000V AC/DC.
 Mechanical:
 Contact Material:Copper Alloy.
 Contact Plating:Au or Sn Over Ni.
 Insulator Material:Polyester UL94V-0.
 Standard:PA6T.
 Environmental:
 Operating Temp Range:-40°C~+125°C

Ordering Code:
 84040-3 035 MS XX X X 01

Contact Plating C0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10U"Gold G4=15U"Gold G5=30U"Gold S0=GoldFlash/Tin SN=Tin	Insulator Material A=BK-PBT B=BK-PA6T C=BK-PA9T D=BK-LCP	Packing O=FE Bag A=Tray
---	--	-------------------------------



THIS DRAWING IS A CONTROLLED DOCUMENT

TOLERANCES UNLESS OTHERWISE SPECIFIED
 0 PLC ± —
 1 PLC ± 0.30/.012
 2 PLC ± 0.25/.010
 3 PLC ± 0.20/.008
 4 PLC ± 0.10/.004
 ANGLES ± 3°

UNITS	SCALE	SIZE
mm/inch	FIT	A4
DRAWN BY	DATE	TITLE
<i>Xu</i>	8/30/2024	4.00MM PITCH 35P AUTOMOTIVE CONNECTOR
ENGINEER	DATE	PART NO.
<i>Zhang</i>	8/30/2024	84040-3035MSXXXX01
CHECKED BY	DATE	DRAWING NO.
<i>Mike</i>	8/30/2024	84040
APPROVED BY	DATE	
<i>Andy</i>	8/30/2024	



YTCO TECHNOLOGY
 HTTP://WWW.YTCO.CO E-MAIL:SALES@YTCO.CO