
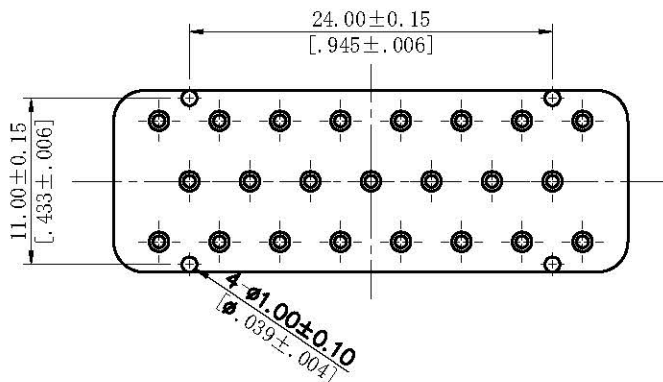
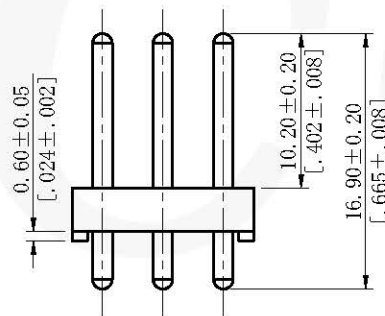
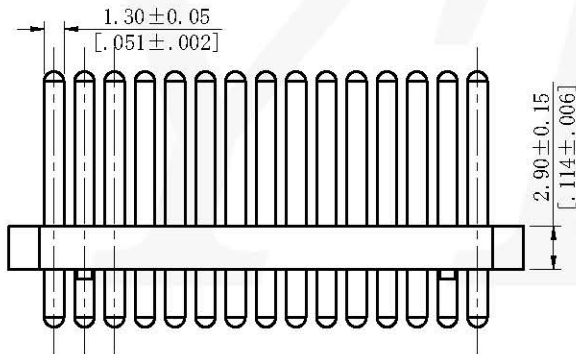


REV	REVISION	NAME	DATE

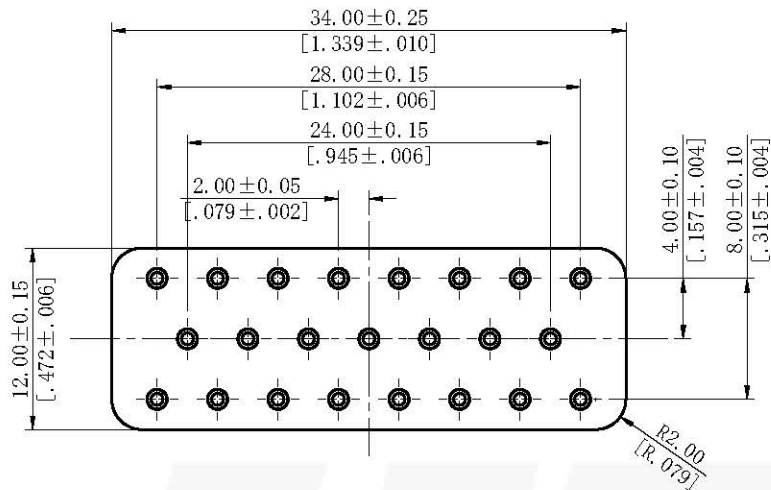

Electrical:  
 Current Rating:8.0AMP.  
 Contact Resistance:20mΩ Max.  
 Insulation Resistance:1000MΩ Min.  
 Withstanding Voltage:1000V AC/DC.  
 Mechanical:  
 Contact Material:Copper Alloy.  
 Contact Plating:Au or Sn Over Ni.  
 Insulator Material:Polyester UL94V-0.  
 Standard:PA6T.  
 Environmental:  
 Operating Temp Range:-40°C~+125°C

Ordering Code:  
 84040-3 023 MS XX X X 01

Contact Plating C0=Gold Flash C1=3u" Gold C2=5u" Gold C3=10U"Gold C4=15U"Gold C5=30U"Gold S0=GoldFlash/Tin SN=Tin	Insulator Material A=BK-PBT B=BK-PA6T C=BK-PA9T D=BK-LCP	Packing O=FE Bag A=Tray
---	--	-------------------------------



THIS DRAWING IS A CONTROLLED DOCUMENT

TOLERANCES UNLESS OTHERWISE SPECIFIED	UNITS mm/inch	SCALE FIT	SIZE A4
0 PLC ± —	Drawn By <i>Xu</i>	DATE 8/30/2024	TITLE 4.00MM PITCH 23P AUTOMOTIVE CONNECTOR
1 PLC ± 0.30/.012	ENGINEER <i>Zhang</i>	DATE 8/30/2024	PART NO. 84040-3023MSXXXX01
2 PLC ± 0.25/.010	CHECKED BY <i>Mike</i>	DATE 8/30/2024	DRAWING NO. 84040
3 PLC ± 0.20/.008	APPROVED BY <i>Andy</i>	DATE 8/30/2024	PROJ. 594309442
4 PLC ± 0.10/.004	ANGLES ± 3°	FACE CODE A/D/YTCOTZ/Automotive/4.00mm	FILE PATH A/D/YTCOTZ/Automotive/4.00mm



**YTCO TECHNOLOGY**  
 HTTP://WWW.YTCO.CO E-MAIL:SALES@YTCO.CO